

## HAND DRYERS **GW01 18 04 00 Model BLADEflow-2 white finish**



### Product description

Hands-in hand dryer  
Automatic sensor operated  
Universal motor with brushes  
AISI 304 stainless-steel body with a thickness of 1 mm  
Finish: White  
Efficient dryer: minimum consumption/drying < 15 s.  
Outstanding robustness, Heavy duty  
3-year warranty

### Technical specifications:

The Hands-in hand dryer consists of a compact body of 1 mm thick AISI 304 stainless steel that is mounted against the wall on a carbon steel frame. The frame is fixed to the wall using 5 holes with the dimensions for an 8 mm drill bit. The dryer is operated by an electronic infra-red sensor and it automatically stops after the hands have been withdrawn from the sensor field or after 60 seconds (vandal-proof disconnection). The air is blown out through a linear matrix of holes for ideal distribution of the air and drying by dragging the water off the hands. The air temperature is controlled electronically. It works with a universal brushless type motor, 220-240V, 20,000 r.p.m. The air speed is 342 km/h, which allows drying hands in approximately 10 s. The dryer has a total power rating of 1650W with a maximum consumption of 10A. The noise level at a distance of 2 metres is 75dB. The total measurements of the hot air hand dryer are 730 x 300 x 230 mm. The hand dryer model is GW01 18 04 00, manufactured by GENWEC WASHROOM S.L. - Calle Joan Carles I, 46-48 - cp.: 08908 L'Hospitalet de Llobregat - Barcelona. [www.genwec.com](http://www.genwec.com).

### Technical characteristics

#### Electrical specifications

Voltage/Frequency: 220-240V 50/60 Hz  
Maximum intensity: 10 A  
Total power rating: 1650 W  
Resistor power rating: 850 W  
Motor power rating: 800 W  
Motor type: Universal, brushed  
Rotor speed: 20,000 r.p.m.  
Protection class: IPX1  
Resistor overheat thermostat.  
(Automatic reset)

#### Mechanical specifications


Air flow: 3807 l/min (228 m<sup>3</sup>/h)  
Air speed: 342 km/h  
Noise level at 2 m: 75 dB  
Output air temperature at an ambient T. of 21 °C: 60°C  
Outer casing type: AISI 304 Stainless steel

#### Packaging specifications

- Type of individual package: Single cardboard box with expanded polystyrene and a plastic bag
- Units per box: 2
- Units per pallet: 8 (\*)

(\*) Height below 1.1 m.

HAND DRYERS **GW01 18 04 00 Model BLADEflow-2 white finish**

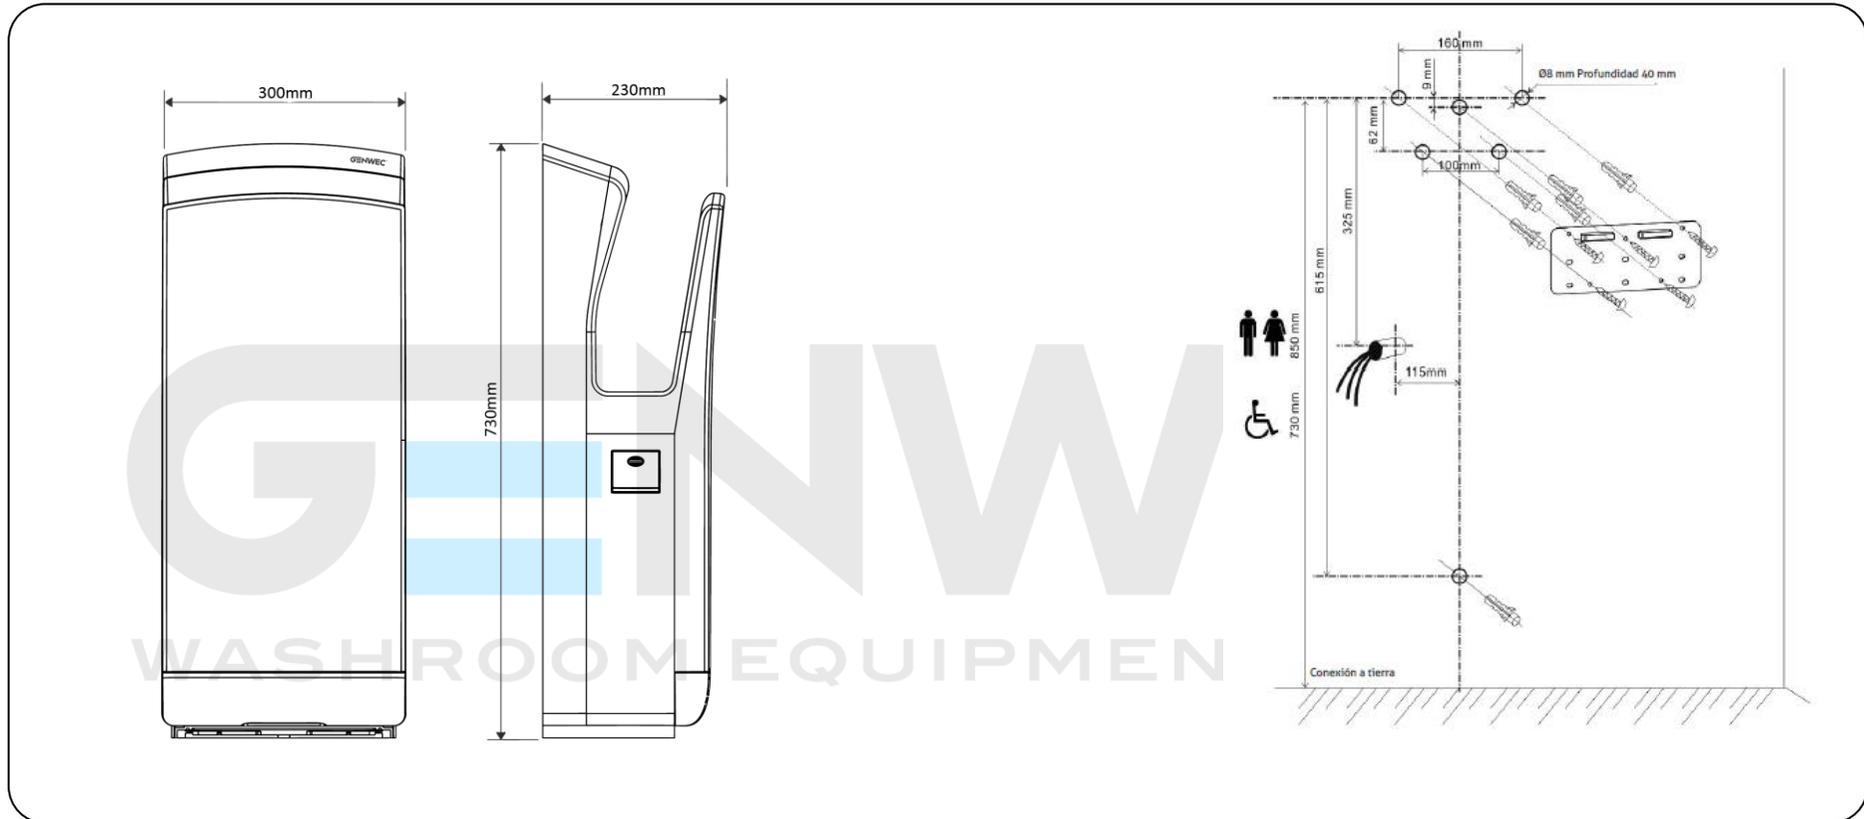

**Cleaning:** A cotton cloth slightly dampened in a soapy solution is recommended. Then dry off. Do not use any strong chemicals or cleaning agents that can be dangerous to children.