



Dolphin Blue Electronic Taps

Panel Mounted



Remote DB 51



DBL 1500 / DBL 1525 Dolphin Blue Panel Mounted Infrared Tap

- Touch Free Tap – for ultimate hygiene – prevents cross contamination
- Quality solid brass construction with the option of two durable finished: polished chrome plating or lacquered brushed nickel plating
- Water Supply: Single inlet cold or pre-mixed – a TMV2 or TMV3 thermostatic mixing valve is recommended for premixed applications
- Flow rate – 6 litres/minute (4 litres/ minute also available – please specify)
- Power Source: Plug-in 9 Volt transformers or 9 Volt Battery (with low battery warning) – for other power source options see page 270-271
- Tap settings may be adjusted manually or by using remote control (DB51 – see page 268)
- Mandatory Hygiene Flush feature can be specified to combat Legionella
- 2 year manufacturer's warranty
- Maximum water temperature 70°C
- Operating pressure 0.5 - 8.0 bar (7 - 116 PSI)
Recommended minimum distance between sensor and the bottom of basin = 300 mm (discuss with Dolphin Technical)
- **DBL 1525 comes complete with a DB 80 Battery Backup device**

Order code	Power Source	Finish	Power Connections		Panel: hole	Min-Max thickness
			Tap	Power Source		
DBL 1500 C	6 x AA Battery	Chrome Plated	Female	Male	Ø 23-40mm	10-30mm
DBL 1500 S	6 x AA Battery	Brushed Nickel Plated	Female	Male	Ø 23-40mm	10-30mm
DBL 1525 C	9v Transformer	Chrome Plated	Female	Male	Ø 23-40mm	10-30mm
DBL 1525 S	9v Transformer	Brushed Nickel Plated	Female	Male	Ø 23-40mm	10-30mm


SPECIFICATION PHRASE

DBL 1500C Dolphin Blue
Chrome Plated Infrared
Tap powered by battery

DBL 1500S Dolphin Blue
Brushed Nickel Plated Infrared
Tap powered by battery

DBL 1525C Dolphin Blue
Chrome Plated Infrared
Tap powered by 9V transformer

DBL 1525S Dolphin Blue
Brushed Nickel Plated Infrared
Tap powered by 9V transformer

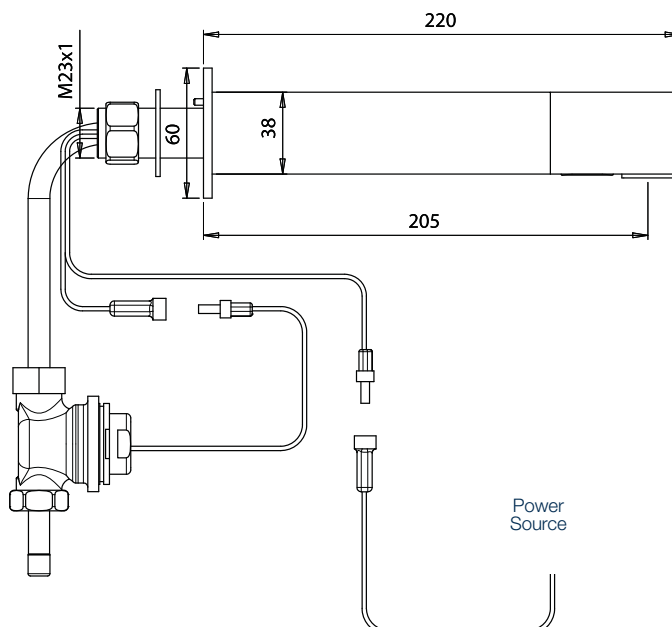

DBL 1500C / DBL 1525C



DB 1500C / DB 1525C



DB 700



DB 1400