




## Prestige Automatic Foam Soap Dispenser

# PDH704

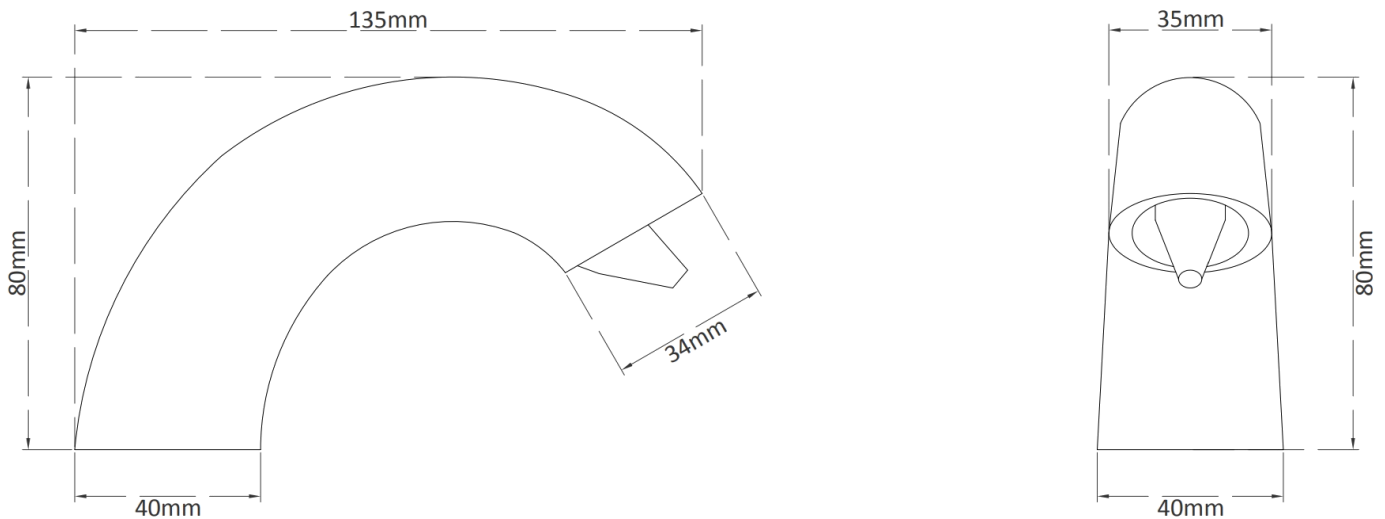

**Materials:** Constructed from Type UK 304 stainless steel, 0.9mm gauge with exposed surfaces in a polished finish.

**Installation:** Spout— Feed thread through counter top. Fasten the brass nut up to the base of the countertop. Please take extra care not to trap either tube or cable when installing.

Control Box—Place the mounting bracket on the wall. Install the control box on the bracket.

**Specification:** Prestige Automatic Foam Soap Dispenser for counter mounting operation. Counter hole cut out: 35-40 mm. Counter top maximum thickness 40 mm. Power supply: AC110/240V ~DC 6. Standby power usage 0.4W (<3W). Operational power usage 1.2W (<5W). Adjustable foam soap volume 0.5~25 ml (factory setting: 15±5 ml).

**Prestige Radiators Ltd**

**Unit 2, North Point Business Park, Selby Road, Eggborough, DN14 0JT**

The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet.

We reserve the right to make changes and improvements to the design and dimensions.

Revised 21st September 2017

© Prestige Radiators Ltd